

BRUCE 布鲁斯

BRUCE 布鲁斯

400-8890-100
www.chinabruce.cn



P5

平台式高速电脑绷缝机

High speed computerized flat-bed interlock



怕跳针 · 怕断线 · 就用布鲁斯
NO BREAK · NO SKIP

台州市布鲁斯缝制设备有限公司
TaiZhou Bruce Sewing Machine Co.,Ltd.
浙江省台州市椒江区东海大道东段1008号2号楼
No.2 building No.1008 Eastern Section East Sea Road Jiaojiang
District Taizhou, Zhejiang.

2020.07



怕跳针 · 怕断线 · 就用布鲁斯
NO BREAK · NO SKIP




自动剪线、自动抬压脚

Automatic thread trimming, automatic presser foot lifter

车缝结束后自动剪线自动抬压脚，出活效率比普通直驱机提升40%以上。

With auto trimming, auto presser foot lifter functions, efficiency improve by 40% at least compared with normal type.

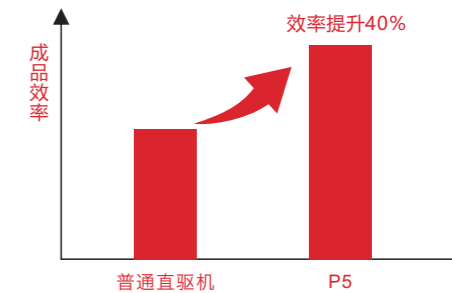

一键还原，操作无忧


One key to reset, easy operation

一键恢复出厂设置，更加人性化，不必为按错而烦恼。

One key to factory reset, more humanized.

P5

品名：平台式高速电脑绷缝机
High speed computerized flat-bed interlock

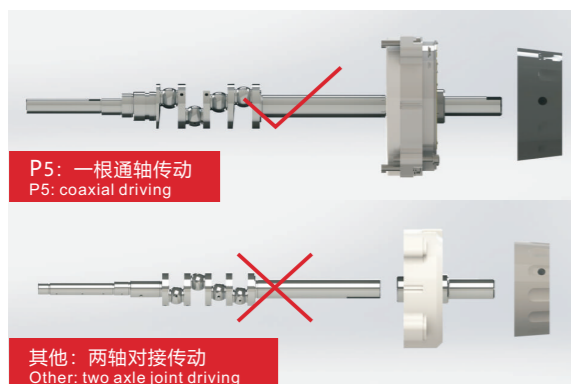


通轴传动，轻快稳定

Coaxial driving, stable and reliable

降低整机力矩，机器运行稳定轻快，更经久耐用。

Reduce machine torque, make the sewing fast, stable and durable.

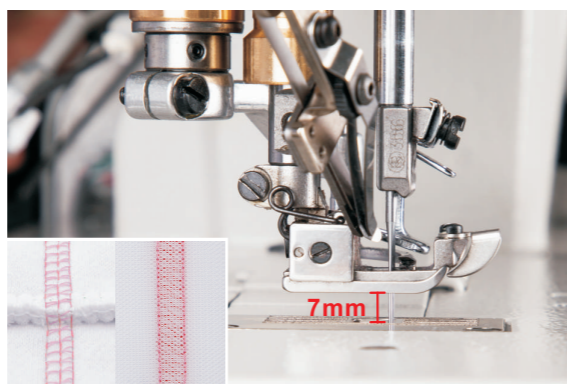

过厚顺畅、缝薄不起皱

From light to heavy duty, beautiful stitches

适合长片面料的缝制，过骨位顺畅，线迹均匀美观不变密，车缝网纱等薄料时不起皱。

Suit for long piece fabric, smoothly sewing from light to heavy duty with beautiful stitches, no fabric gathering even for yarn sewing.

技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
				(mm)		(mm)	(S.p.m)	(mm)		NW/GW	(kg)	
P5-UT2-01GB	基本缝 Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64	
P5-UT2-02BB	滚领缝 Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64	
P5-UT2-03DB	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64	
P5-UT2-08AC	下摆折边缝 Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64	
P5-D-01GB	基本缝 Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58	
P5-D-02BB	滚领缝 Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58	
P5-D-03DB	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58	
P5-D-05CB	缝松紧带(右刀) Elastic lace attaching (right-side cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	4000	670×445×595	48/58	
P5-D-07CB	缝松紧带 Elastic lace attaching	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58	
P5-D-08AC	下摆折边缝 Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58	
P5-D-23GB	基本缝(大针距) Plain Seaming (Large stitch length)	UY128GAS 11-14#	3	5	6	5.6/6.4	0.65-1	7	4000	670×445×595	48/58	
P5-D-23BB	滚领缝(大针距) Tape Binding (Large stitch length)	UY128GAS 11-14#	5	6	5.6/6.4	5.6/6.4	0.65-1	7	4000	670×445×595	48/58	
P5-D-23GBL	基本缝(超大针距) Plain Seaming (Extra large stitch length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58	
P5-D-23BBL	滚领缝(超大针距) Tape Binding (Extra large stitch length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58	

注 (Note) :

- 1、UT2代表电脑车，不标配上剪线刀，D代表直驱机
1. UT2: computerized type without upper cutter, D: direct drive type
- 2、电脑车还可选配UT款，标配上剪线刀。
2. UT: computerized type with upper and lower cutter